

These grab hooks can be used to shorten a sling. The throat shaped opening and deep chain pocket will hold the chain firmly in place. The saddle at the bottom of the hook gives full support to the chain link so there is no reduction in WLL.

Please find herewith the latest Van Beest product information including details of these grab hooks. For more information please contact us: **sales@vanbeest.com**


EXCEL® Stainless steel Eye grab hook

Material : AISI 316L, grade 5Safety factor : MBL equals 4 x WLL

• Finish : polished

• Certification : at no extra charge this product can be supplied with a works certificate and/or EC Declaration of Conformity

	chain meter	working load limit	length	inside length eye	inside width eye	opening	thick- ness	width	width outside	length	width	thick- ness	weight each
			а	b	С	d	е	f	g	h	i	j	
mm	inch	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
6	⁷ / ₃₂	0.7	41	24	23	8	24	20	42	94	9	6	0.25
7-8	1/4 - 5/16	1.2	53	27	26	10	33	23	53	115	10	8	0.32
10	3/8	1.6	65	38	36	12	40	29	66	146	14	10	0.53
13	1/2	2.7	83	42	41	15	56	40	88	183	16	12	1.96

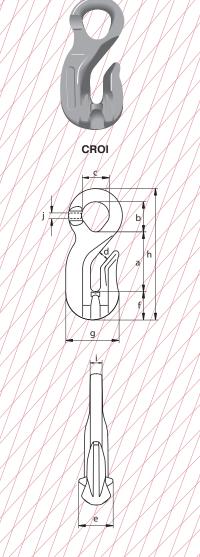

VAN BEEST BV, Manufacturer and Supplier of wire rope- and chain fittings. Reg. trade marks 'Green Pin' and 'Excel'



P.O. Box 57
3360 AB Sliedrecht
The Netherlands
Industrieweg 6
3361 HJ Sliedrecht

 Telephone
 +31 184 41 33 00

 Telefax
 +31 184 41 49 59

 E-mail
 sales@vanbeest.co

 Internet
 www.vanbeest.com

